


GAC-2111 double shielded (10550)

Rebuild of the legendary EMT-2111 Audio cable with ultrastrong PUR-jacket.

Ideal for outdoor use and installations where mechanical strength of the cable is recommended.

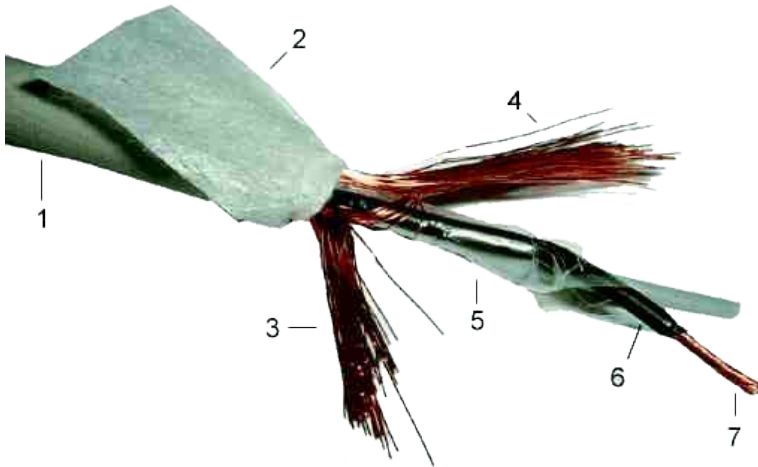

1	Jacket	PUR, \varnothing 4.5 mm, grey (light)
2	Viscose fiber coat	Counter wrapped to the shields
3	Shield No. 1	Bare copper wires (0.10 mm), 100% coverage
4	Shield No. 2	Bare copper wires (0.10 mm), 100% coverage
5	Separation	PE-coated
6	Insulation	PE, \varnothing 1.20 mm, conductors red and white wrapped
7	Conductor	Stranded bare copper wires, 28 x 0.1 mm (0.22 mm ²)

Conductor resistance	< 85 Ohm /km	Test voltage cond/cond	500 V eff.
Shielding resistance	< 20 Ohm /km	Test voltage cond/shield	2000 V eff.
Cap. @ 800 Hz, cond/cond	< 62 nF /km	Operating voltage	low voltage
Cap. @ 800 Hz, cond/shield	< 119 nF /km	Temperature range (flex)	- 5° to +50° C
Charact. imped. @ 20 kHz	145 Ohm	Temperature range (fix)	-30° to +70° C

Order No.	Type	\varnothing mm	Color	Spool Size	Weight /Spool	Shipping Unit
10550	GAC-2111	4.5	grey	150 m	4.3 kg	4 x 150 m